


# Divino

LUXURY VINYL TILES



MADE IN BELGIUM

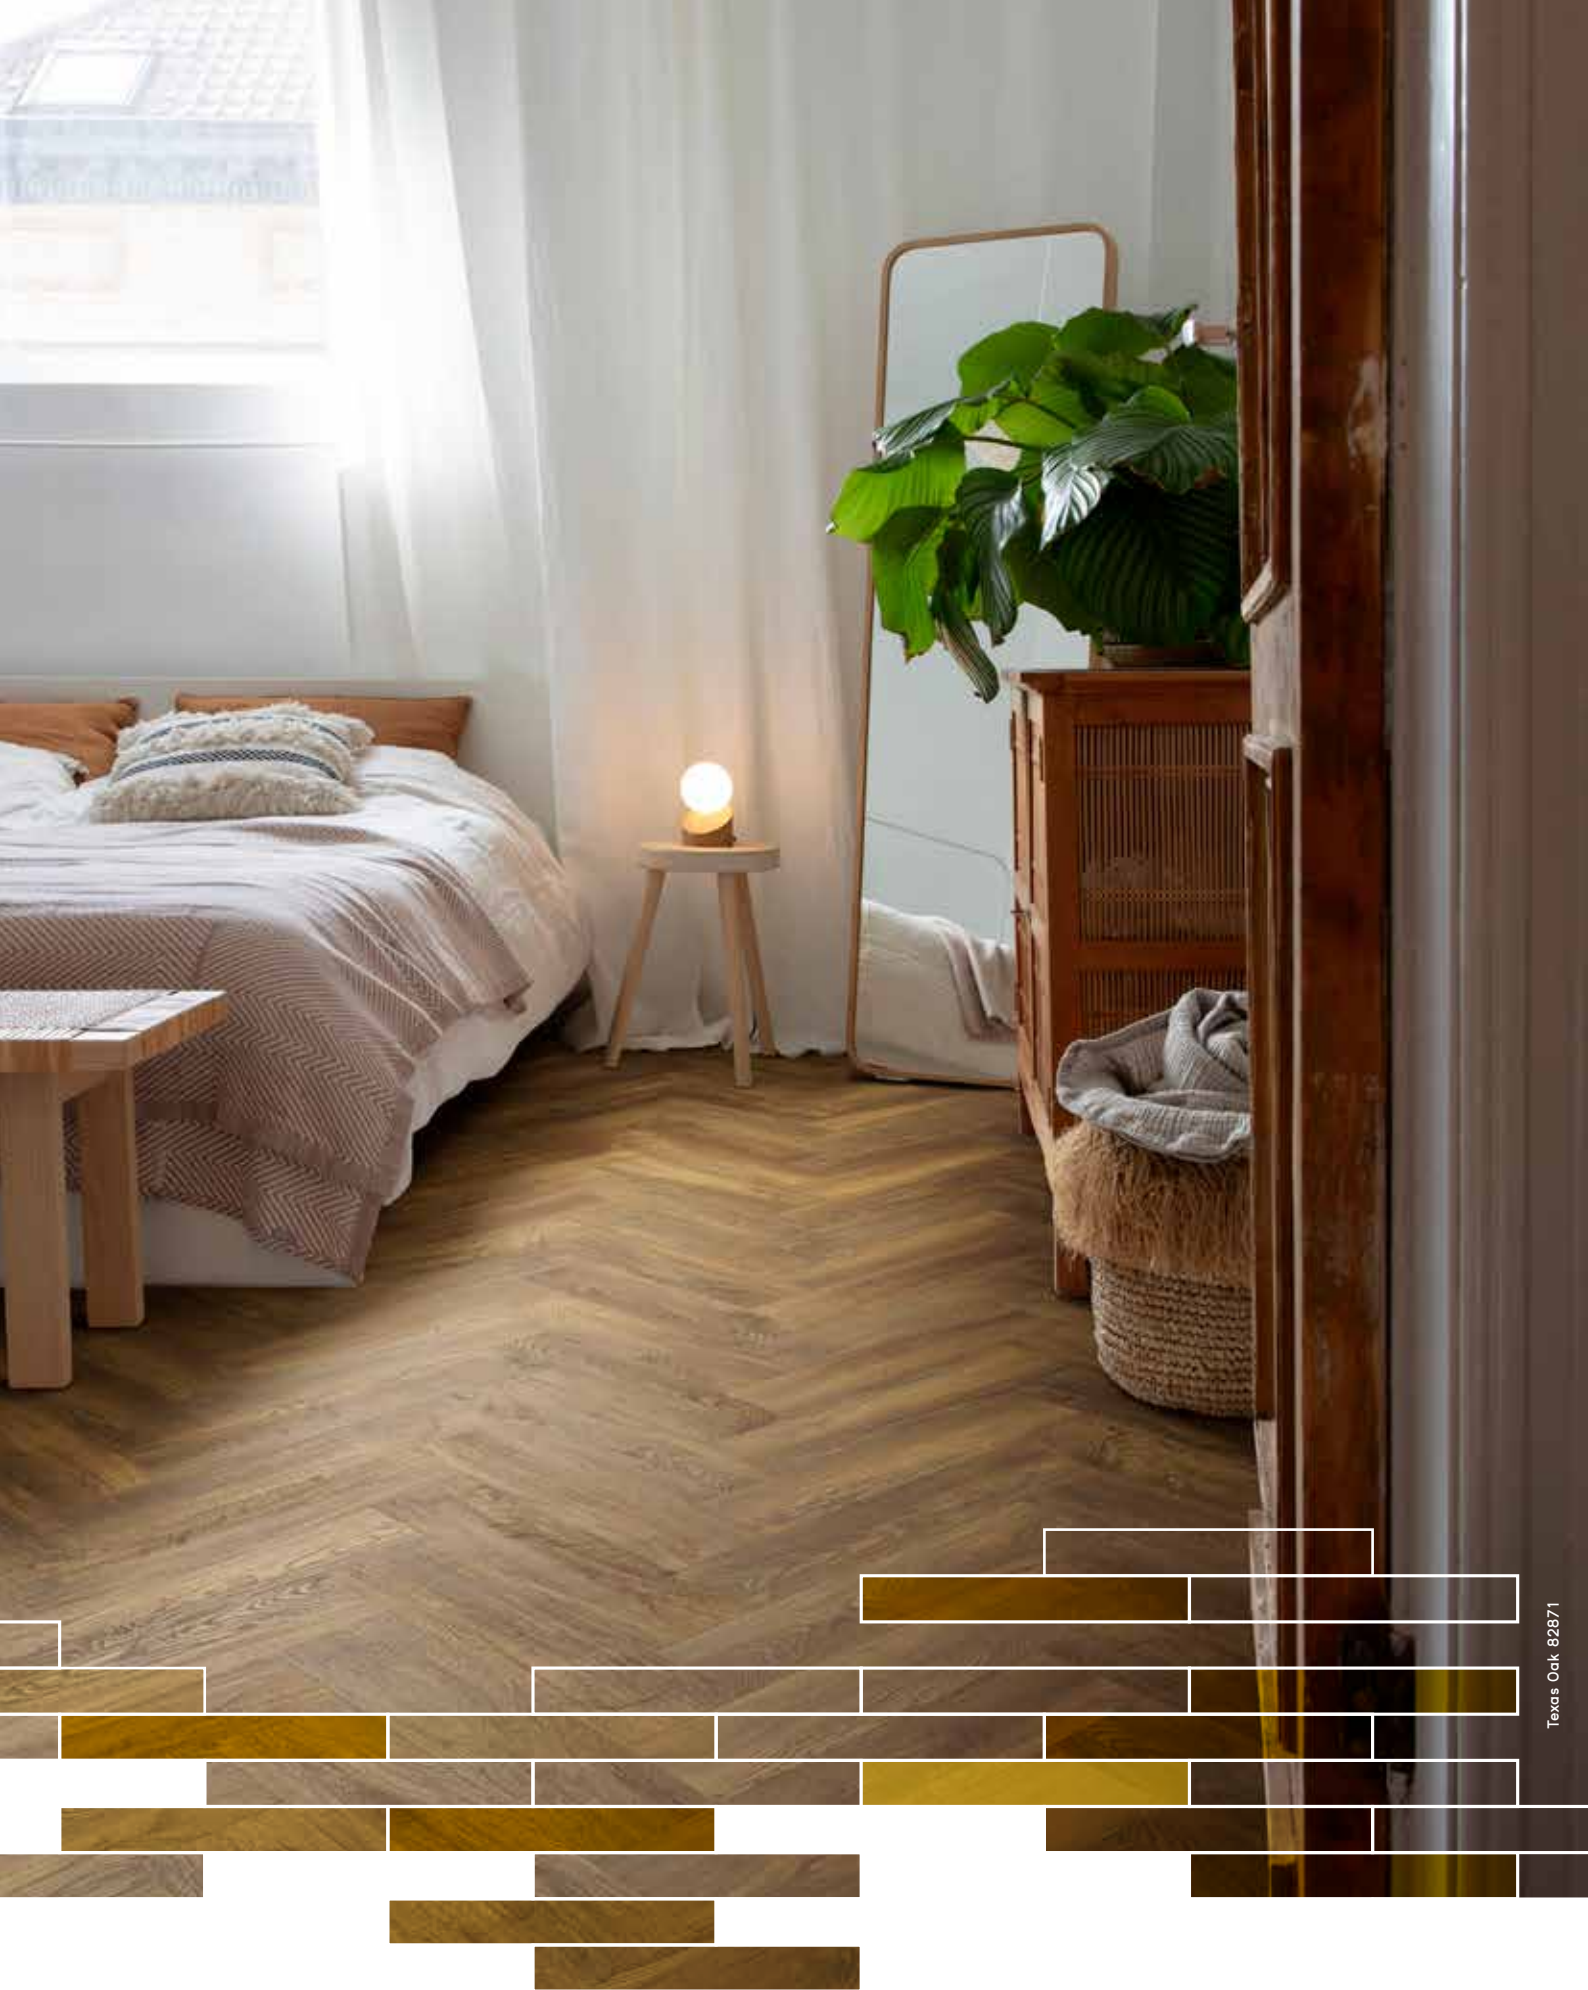

Texas Oak 82871

# Content

DIVINO

<b>#01</b>	<b>Introducing Divino</b>	<b>#05</b>	<b>Perfect finish</b>
	p. 4		p. 12
<b>#02</b>	<b>Why choose Divino?</b>	<b>#06</b>	<b>Looks</b>
	p. 7		p. 14
<b>#03</b>	<b>A performance multi-layered floor</b>	<b>#07</b>	<b>Technical specifications</b>
	p. 8		p. 33
<b>#04</b>	<b>Installation</b>	<b>#08</b>	<b>Meet Unilin Flooring</b>
	p. 10		p. 34



#01

# Introducing

DIVINO

Full of benefits that make them easy to live with, Luxury Vinyl Tiles are a popular choice in today's homes. The durable vinyl planks and tiles are moisture-resistant and provide a reliable and stylish flooring solution. Developed and made in Belgium, Divino's eight layer construction brings comfort, softness and warmth with quality and durability for any room.

Supported by a team of Belgian flooring specialists we go the extra distance to create the ultimate LVT collection. That's why Divino has a wide range of true-to-nature wood and tile effects in shades that bring an original and natural look. And with our 'embossed in register' (EIR) technology, Divino rewards your home with a practical floor that looks and feels just right.


“

*With authentic designs and sophisticated technology, these divine floors are the very definition of Belgian craftsmanship.*

”

Museta 46531



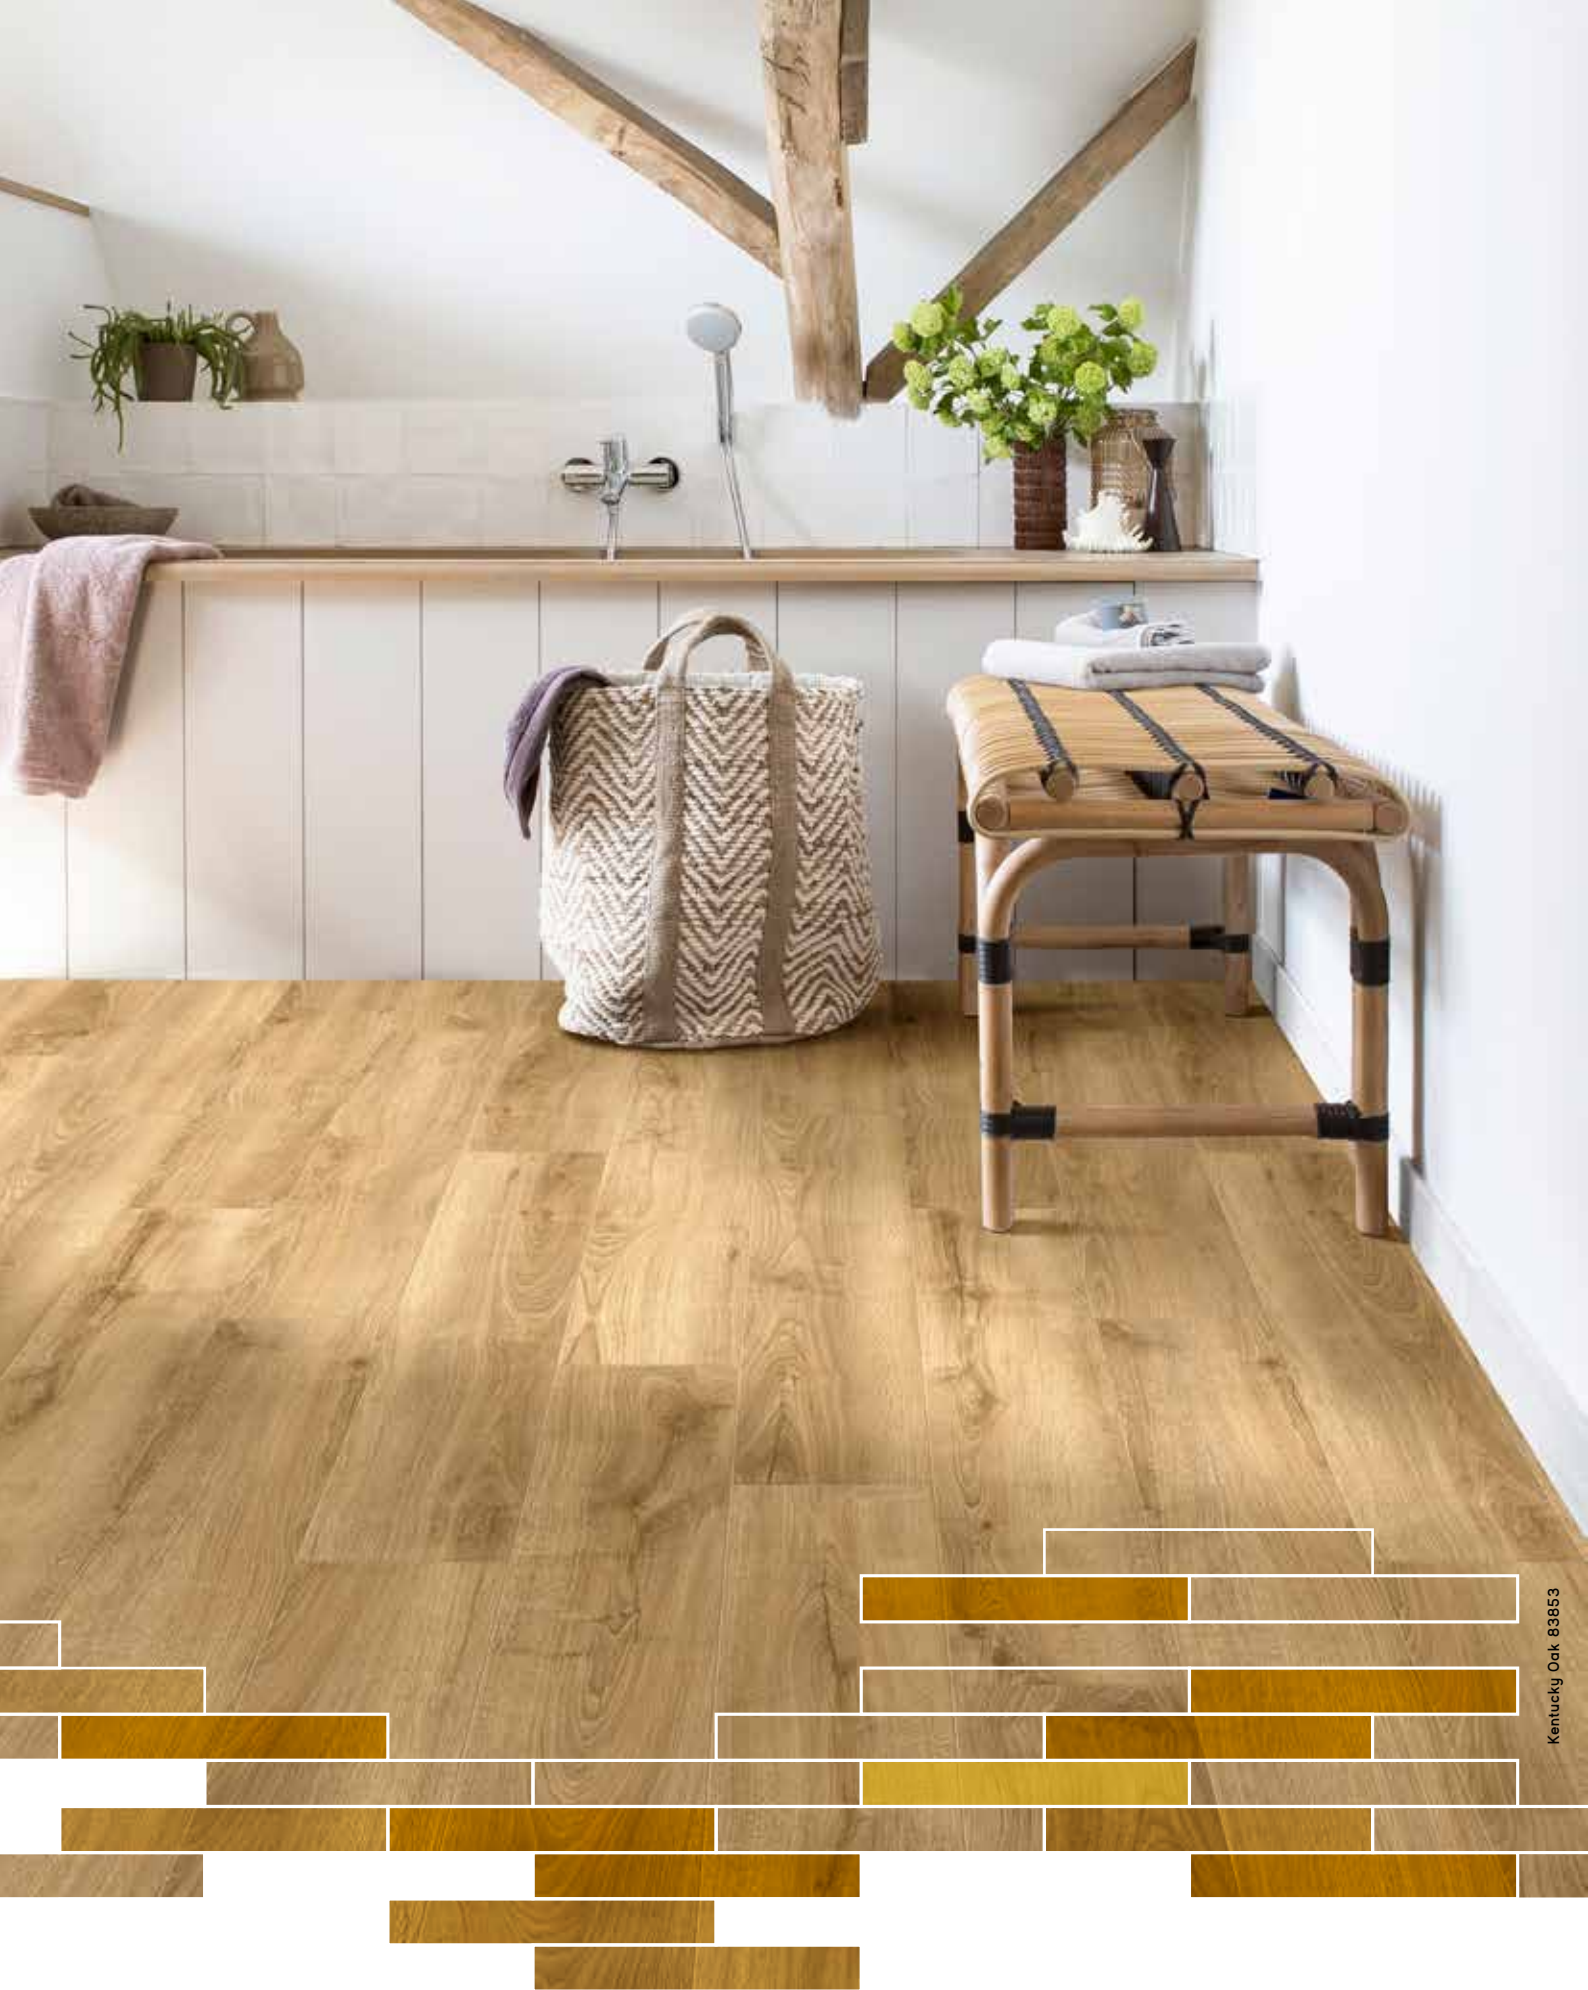

Kentucky Oak 83853

#02

# Why choose Divino?

THE MANY BENEFITS OF DIVINO

Soft, warm and quiet, Divino is a floor that's sure to make everyone feel comfortable. What's more, its long-lasting finish is wonderfully simple to look after.



## Belgian quality

Every Divino floor is made in Belgium for a floor of true quality. Its multi-layer construction is strong, stable and resistant to temperature changes. This means a floor that's ready for home (Class 23) and even commercial (Class 33) use, proving its quality for every type of room.



## True to nature

With a design, structure and gloss level that's true to nature, Divino stays faithful to the beauty of wood. 'Embossed in register' (EIR) and with a minimal pattern repeat, this floor brings the best in natural looks to every room.



## Easy comfort

Choosing Divino means enjoying a floor that's quickly installed and easy to look after. Moreover its practicality doesn't come at the expense of a soft underfoot feel, warmth and an ability to soak up sound: Divino makes any room feel more comfortable.

# A performance multi-layered floor

## HOW IS DIVINO MADE?

Our R&D and production teams in Belgium are always looking for ways to make better floors. Divino is a result of this collective effort. Developed and manufactured in-house, it harnesses the very best flooring technology available today. Showcasing the innovation that runs through Unilin Flooring, the compact multi-layer construction delivers powerful performance. Scratch-resistant, stainproof and with top class dimensional stability, it's a floor that's made to withstand life, day in and day out.

Let's look at Divino's multi-layer construction in a little more detail:



### 1/2 Protective Superguard Pride® for ease of living



The double protective PU lacquer, Superguard Pride®, sets Divino apart with its superior scratch resistance and stain-fighting abilities. This advanced double lacquer ensures Divino can withstand daily wear and tear, is pet-proof, and requires minimal maintenance. Superguard Pride® keeps Divino's true-to-nature designs looking matte and brand new.

### 5/7 Double glass-fibre for a stable floor



The patented dual glass-fibre construction is responsible for Divino's class-leading stability. Keeping the floor locked to the ground, regardless of temperature, these two layers give the strength needed for bathrooms, garden rooms and underfloor heating, and allow it to be installed on a self-adhesive underlay.

### 3 A reliable wear layer



Divino's 0.55mm wear layer ensures it's safe from the wear and abrasion of everyday life. It's part of the reason why Divino brings a lasting floor finish in any room and why it comes with a long 25-year residential warranty.

### 6 A durable compact core



Crucial to Divino's durability, the high-strength compact core provides indentation resistance. So, no matter how many times you rearrange your room, Divino stays in great shape. What's more, this core is made from up to 46% recycled content from both production waste and externally collected material.

### 4 True-to-nature design



Our in-house design process means true to nature designs that you won't find anywhere else, while a bevelled edge leaves each plank beautifully defined. Divino's synchronised 'embossed in register' (EIR) technology brings out every detail, so you can see and feel the realism of its wood structure.

### 8 Backing layer with extra grip



Connecting Divino to the prepared subfloor beneath, the backing layer's embossed 'grip' texture gives the adhesive extra hold. We've also included a direction arrow, so you know exactly the right way to install an authentic looking floor.

## GLOSSARY



Design



Strength



Eco-friendly, durable



Dimensional stability



Scratch & stain



Moisture protection




## VINYL DRYBACK SYSTEM

# Easy installation

Divino is remarkably effortless to install thanks to its flexibility, that means it can be easily cut to shape. Its world-class dimensional stability allows you to choose your preferred installation method. The classic way with adhesives adhered to the subfloor, or a quick and innovative solution with a self-adhesive underlay Flex Pro Eco.

## The classic way

## The smart way

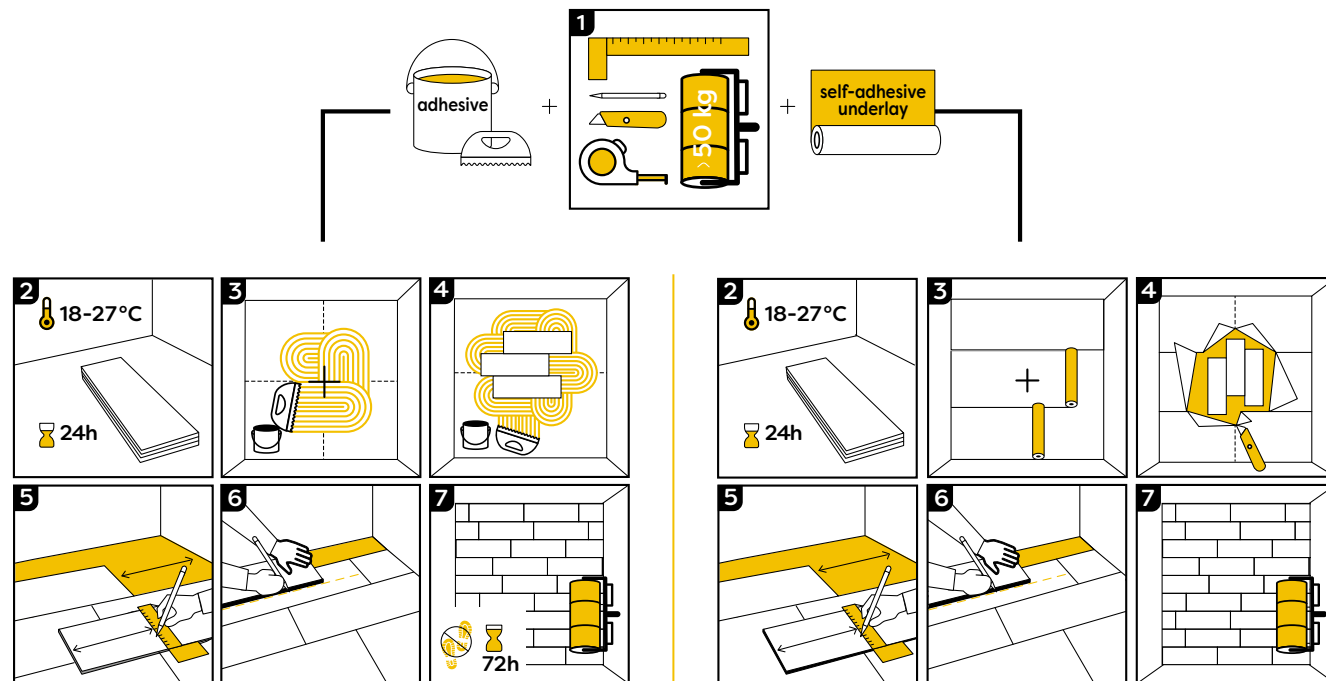

PS adhesive  
SFVADHPS(-)

Qualitative adhesive for bonding LVT flex floors onto sound and suitably dry subfloors. Available in 5 kg and 15 kg buckets.



HT adhesive  
SFVADHHT(-)

Adhesive for rooms with big temperature fluctuations. Available in 5 kg and 15 kg buckets.



Flex Pro Eco  
SFVUDLFLEXPROECO

A self-adhesive, recyclable underlay offering a quick installation, minimal subfloor prep and excellent sound insulation. - 6.5m<sup>2</sup>



Floor Prep  
SFVFLOORPREP

An installation on tiles and not sure about the joints? Use Floor Prep, a ready to use levelling compound for smoothing tile joints (>2mm) before installing the Flex Pro with your floor. - 5kg

## THE SMART WAY

# Flex Pro Eco

The Flex Pro Eco is a self-adhesive vinyl underlay for floating installations, so no adhesive is needed. The underlay allows for quick installation with minimal subfloor prep and offers excellent sound insulation. It is eco-friendly and can be recycled with the vinyl floor.



Superior sound insulation  
Excellent for rooms below and adjacent



Sustainable choice  
Easily removeable  
Revolutionizing vinyl dryback recycling



No adhesives needed  
No subfloor preparation




Recover program  
Classic installed vinyl dryback cannot be recycled due to glue contamination. With our new method, we're able to recycle both the floor and underlay together. Be a part of our effort to create new floors with our Recover program (see p35).

Tiles? No problem

Install the Flex Pro Eco over existing tile joints of up to 2mm.

Wider joints? Use the Floor Prep

- Ready to use
- Easy to apply
- Hardens quickly (1h)
- No primer needed

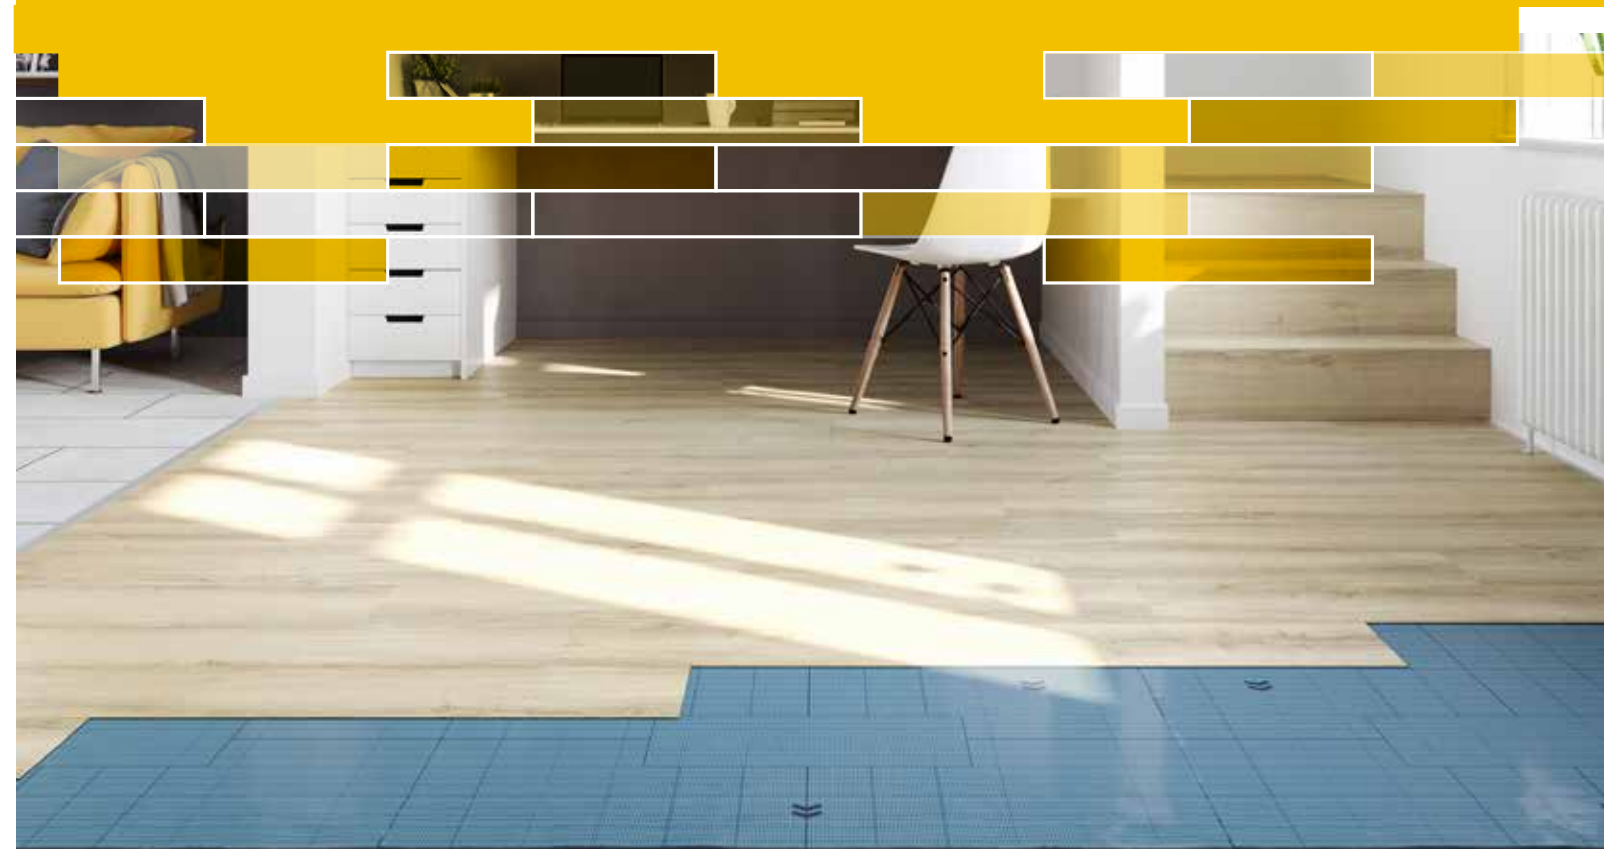

# Perfect finish

ACCESSORIES TO EASE YOUR MIND

For the perfect finish, you need the perfect range of accessories. From finishing tools, to skirtings and profiles, SmartFinish® has everything you need. What's better still, they are all made to the same exacting standards as your Divino floor.

## Skirtings



### Colour matched skirtings

Go for a colour-matched finishing with our high quality SmartFinish skirtings with MDF core. Available in 3 shapes in a matching design for your floor.

- Parquet skirting - SFPSK(-)  
2400 x 14 x 77 mm
- Standard skirting - SFSK(-)  
2400 x 12 x 58 mm
- Scotia - SFSCOT(-)  
2400 x 17 x 17 mm

### White & paintable skirtings

Paint these skirtings in the same colour as your walls or simply leave them white thanks to their multifunctional topcoat.

- Paintable Parquet skirting - SFPSKPAINT  
2400 x 14 x 77 mm
- Paintable Standard skirting - SFSKPAINT  
2400 x 12 x 58 mm
- Paintable Scotia - SFSCOTPAINT  
2400 x 17 x 17 mm
- Waterproof paintable skirting large - SFHSK80PAINT  
2400 x 15 x 80 mm

## Profiles



**Stair profile**  
inner corner SFVSTPINCLICK  
outer corner SFVSTPOUTCLICK  
  
Available in silver.  
2400 x 40 x 26 mm



**End profile**  
SFVENP(-)  
  
Available in silver, black, gold and taupe.  
2000 x 18 x 6 mm

## Finishing tools



**Design strips**  
SFDESIGN(-) - 10 strips of 5m  
  
Personalise your floor with these individually coloured strips.  
Available in 11 colours.



**Joint sealant**  
SFSEAL(-)1000 - 1 kg  
  
Fill small joints to protect your floor from dirt and moisture.  
Available in black, grey, brown, beige and white.




**Smart glue**  
SFGLUE290  
  
Multi-purpose glue that ensures adhesion of skirtings to all materials and substrates. Average usage: 1 tube for 15m of skirtings.

## Maintenance



**Floor cleaner**  
SFCLEANECO1000 - 1000 ml  
  
Thoroughly cleanses your floor, protects the surface and helps to preserve its original appearance. Moreover, it's a biodegradable product, so you're making a sustainable choice.

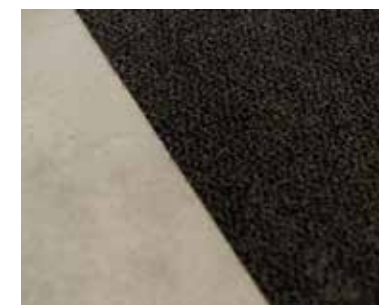

**Entrance mats**  
SFDOORMAT(-)  
  
Qualitative doormat that removes large amounts of dry dirt as well as absorbs water and oil-based moisture.  
Available in 3 colours and 2 sizes.


# Looks

CLOSE TO NATURE

Exacting studies of original materials combine with our craftsmanship to create the unique details of nature. This way Divino floors look impressively authentic. A delicate yet defined 'embossed in register' (EIR) texture, combined with a beautifully matte finish, elevates the feel of every Divino design. Whether you choose our large or square tiles, or opt for our long planks and sophisticated herringbone patterns, each size brings a distinct elegance to your interior, enhancing the overall aesthetic with versatility and style.



\* Also available in medium planks & herringbone  
\* Also available in square tiles

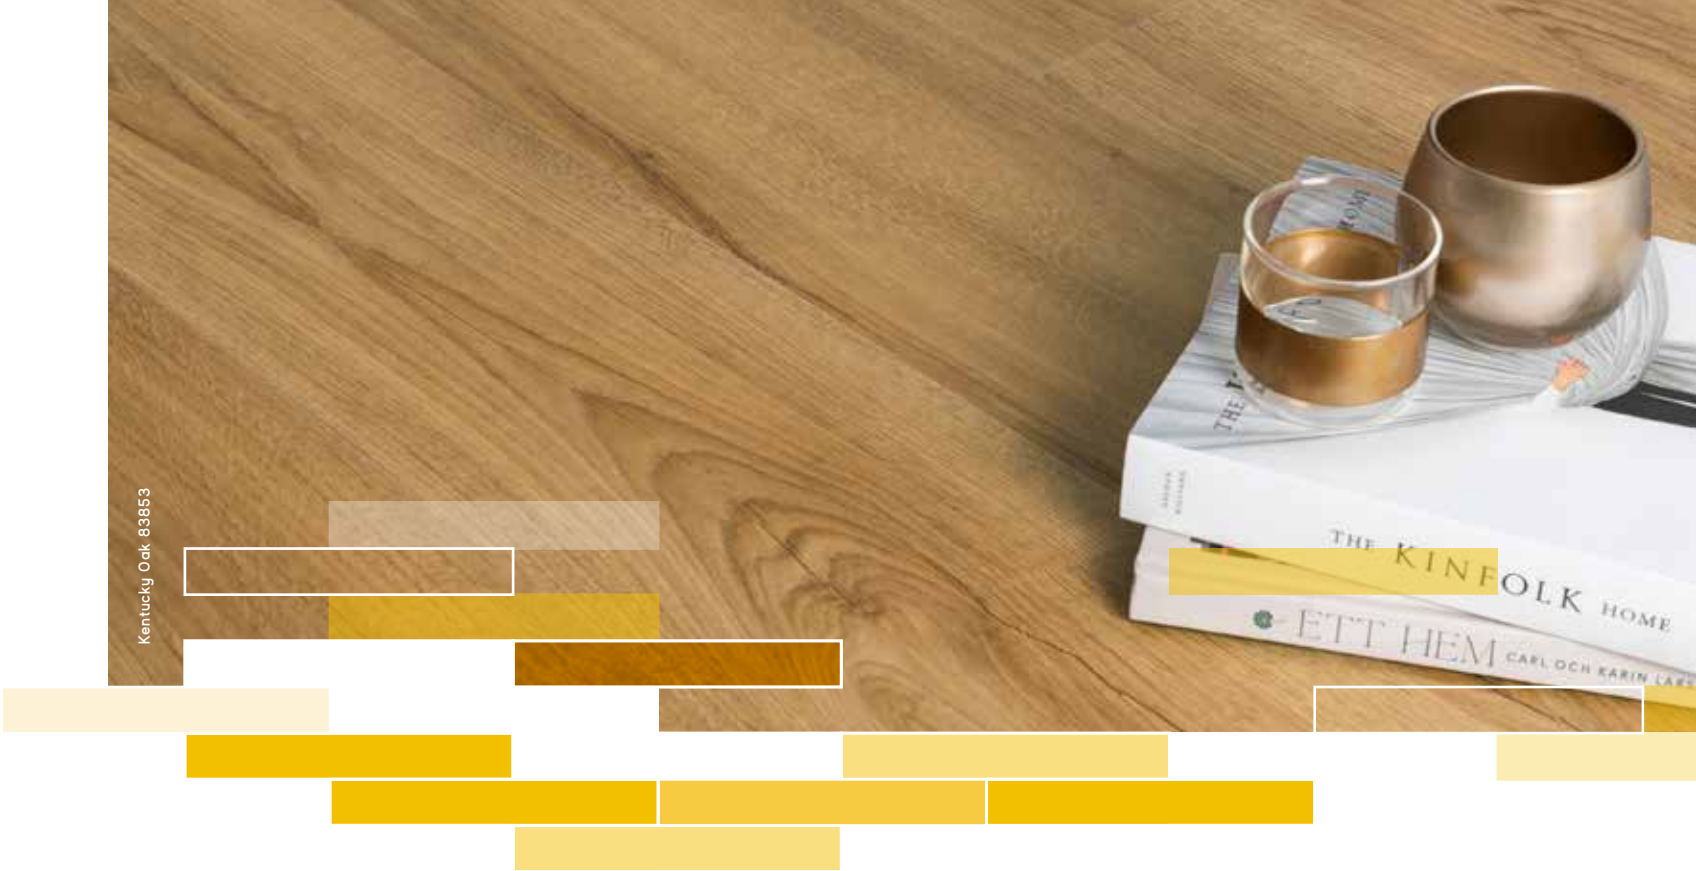





## Barley oak


The deep, earthy tones of Barley Oak create a warm and welcoming ambiance in any space. This flooring offers rustic charm while maintaining an air of sophistication.



84312  
A B C



84227  
A B C

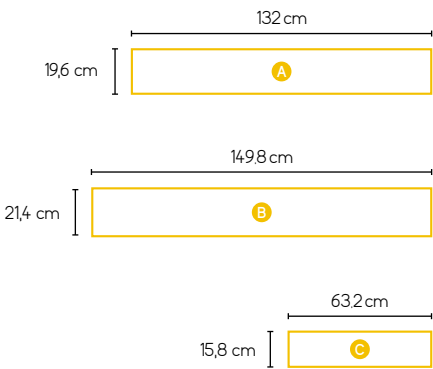

Thickness  
2.50mm

Wear layer  
0.55mm

Top lacquer  
Superguard Pride®

# Tucker Oak

The clean and subtle grain markings of Tucker Oak make it an elegant and classic take on wooden floors. A really accessible design that looks great in modern and traditional settings alike, Tucker Oak's soft 'embossed in register' (EIR) texture enhances its grace.




85236  
A

85926  
A

85296  
A

85246  
A



Thickness  
2.50 mm

Wear layer  
0.55 mm

Top lacquer  
Superguard Pride®







# Kentucky Oak

The rustic appeal of Kentucky Oak means it's a floor that won't go unnoticed, capturing the tonal variations, nuts and cracks of a warm and familiar oak floor. With 'embossed in register' (EIR) texture, Kentucky Oak's character-packed grain really comes to life.




83853  
A B C



83113  
A



83273  
A B C

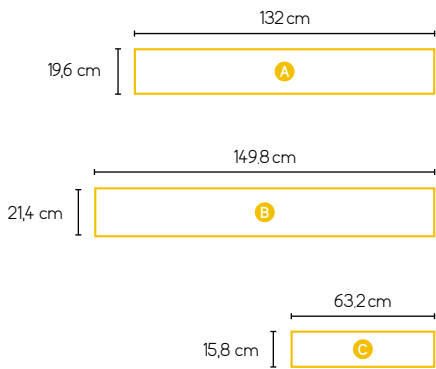

Thickness  
2.50mm

Wear layer  
0.55mm

Top lacquer  
Superguard Pride®





# Texas Oak

A floor with true character and charm. Texas Oak pronounced cracks and natural colour variation add a vibrant feel in any room. The floor's deep 'embossed in register' (EIR) texture captures the light for a striking, true to nature wood effect.



82871  
A B C



Thickness  
2,50mm

Wear layer  
0,55mm

Top lacquer  
Superguard Pride®



82941  
A



82201  
A



82231  
A



82991  
A B C







## Major Oak

A rustic floor that will be a wonderful addition to any interior that wants to exude warmth and character. Whether in a living room or a country kitchen, this flooring enhances your home's natural beauty.




53452  
A B C



53232  
A



53256  
A B C

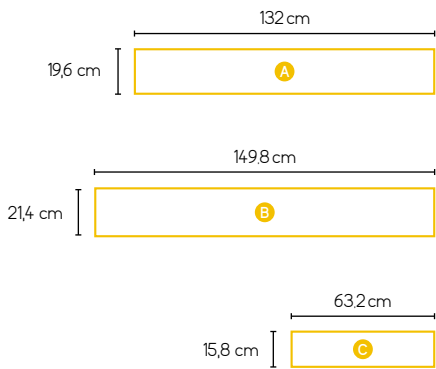

Thickness  
2.50mm

Wear layer  
0.55mm

Top lacquer  
Superguard Pride®

# California Oak

This classic oak floor is a timeless choice that blends elegance and enduring style. With its warm tones, this floor adds a sense of luxury and sophistication to any room.




81209




81439



81811



 **Thickness**  
2.50mm

 **Wear layer**  
0.55mm

 **Top lacquer**  
Superguard Pride®







# Museta

This stunning cast floor captures the essence of authentic materials. The spatulo effect provides a decorative solution for creating elegant and contemporary looks.




46574  
A



46523  
A



46531  
A




Thickness  
2.50mm

Wear layer  
0.55mm

Top lacquer  
Superguard Pride®

# Marmara

This marble exudes luxury and personality with its distinctive veins and patterns that vary from tile to tile.

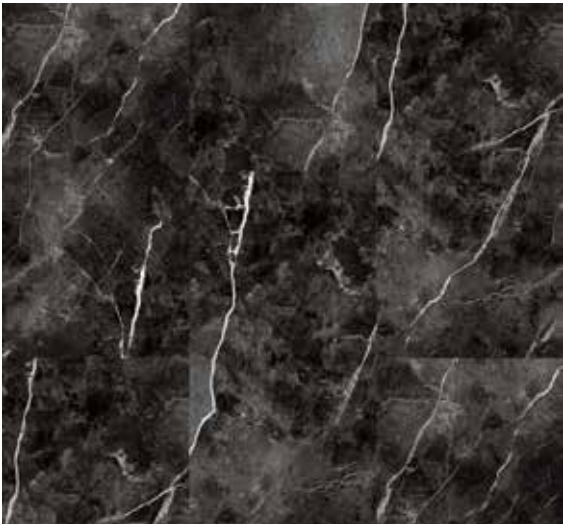



46595  
A



46506  
A B



46537  
A B



Thickness  
2.50mm

Wear layer  
0.55mm

Top lacquer  
Superguard Pride®







Tucker Oak 85246

#07



## TECHNICAL SPECIFICATIONS

### PRODUCT INFORMATION

Productnorm	EN ISO 10582	
Level of use	EN ISO 10874	23 - 33 - 42*
Total thickness	ISO 24346:2006-10	2,50 mm
Wear layer	EN ISO 24340:2012-02	0,55 mm
Wear layer PUR treatment		Superguard Pride®
Total weight g/m <sup>2</sup>	EN ISO 23997:2012-02	4063 g/m <sup>2</sup> [-10%; +13%]

### SIZE & PACKING

Standard planks	ISO 24342:2018-11	19,6 x 132,0 cm
Box planks	14 pcs/box	3,662 m <sup>2</sup> /box
Herringbone	ISO 24342:2018-11	15,6 x 63,2 cm
Box herringbone	24 pcs/box	2,397 m <sup>2</sup> /box
Medium planks	ISO 24342:2018-11	21,4 x 149,8 cm
Box medium planks	10 pcs/box	3,206 m <sup>2</sup> /box
Square tiles	ISO 24342	49,3 x 49,3 cm
Box tile	14 pcs/box	3,403 m <sup>2</sup> /box
Medium tile	ISO 24342	49,3 x 98,6 cm
Box tile	10 pcs/box	4,861 m <sup>2</sup> /box

### TEST RESULTS

Inflammability	EN 13501-1:2018	Bfl-S1
Squareness & straightness	EN ISO 24342:2018-11	≤ 400 mm: ≤ 0,25 mm > 400 mm: ≤ 0,35 mm
Slip resistance	EN 13893:2002-11	DS
Slip restraint	EN 16165:2021-10 Annex B	R9-R10
Residual indentation	EN ISO 24343-1:2012-01	Average result measured: 0,05 mm
Furniture leg resistance	EN ISO 16581:2019-06	No damage
Curling	EN ISO 23999:2021-11	≤ 121 mm
Dimensional stability	EN ISO 23999:2021-11	Norm: ≤ 0,25 % Average result measured: ≤ 0,05 %
Heat insulation	EN ISO 10456	0,25 w/(m.K)
Thermal resistance R	EN 12667:2001-01	0,01 m <sup>2</sup> .K/W
Formaldehyde group	EN 717-1:2004-10	E1
Acoustic insulation	ISO 717-2	ΔLw = 3 dB
Acoustic insulation + Flex Pro underlay	ISO 717-2	ΔLw = 10 dB
Castor chair resistance	ISO 4918:2016-03	No damage to wearlayer, no delamination
Stain resistance	EN 438-2:2016+A1:2018-12	OK
Light fastness	ISO 105-B02:2014-09	≥ 6
Underfloor heating		Suitable, max 27°C
Warranty (year)		25 Residential   10 Commercial

The warranty covers manufacturing defects and premature wear in the event of normal use.

\* Only valid for fully bonded installation, not on looselaid underlays



#08

M E E T

# Unilin Flooring

Unilin Flooring is a global player in the making of vinyl, laminate, wood and carpet tiles. We're the specialist in vinyl flooring within the Mohawk Group, world's largest flooring company. Innovation, entrepreneurship and passion push us to improve people's quality of life by creating better spaces.



On site wind farm to produce our own clean electricity in Belgium.

## Sustainable thinking

With the group-wide One Home sustainability strategy, we're engaged in building a more sustainable future for our planet, customers and employees. So that we are ambitious about our progress, we keep to the guidelines of the Science Based Targets initiative (SBTi), committing that by 2030 we will have reduced our greenhouse gas emissions by 42%. Our **four pillars** will realise this significant reduction in emissions for the production of our Luxury Vinyl Tiles:

### Renewable energy & efficiency



At our Belgian LVT production site, production is powered by three on-site wind turbines. The machinery is efficiently cooled by air and water from the Scheldt river, which is more energy efficient. We've also been harnessing the power of the sun which means that already 60% of need is powered by renewable energy.

### Local production

Our LVT floors are produced in our own cutting-edge production units in Belgium and we source most of our raw materials from within Europe. This localised approach not only guarantees product performance and quality by controlling every step of production: it also helps to minimise the impact of transportation.



### Internal closed loop recycling




We recycle over 99% of our own waste materials through our own internal processes. By adopting our own circular ecosystem, we keep waste materials out of landfill and incineration.



### External recycling

Recycling flooring at the end of its life is a complex challenge due to different materials and contamination by adhesives. At Unilin Flooring, we're working hard on solving this. We're pioneering in adding externally recycled content to our vinyl flooring. Besides that, through the Recover program we are partnering up with experts to set up incoming streams of post-industrial and post-consumer vinyl.



**Recover**  
UNILIN TAKE BACK PROGRAM



Scan the QR-code to read more about 'One Home'

\*Compared to 2020



